

INTRAVision One!

COMPREHENSIVE INSPECTION OF PLASTIC PACKAGING

Designed as a single-camera-system, the IntraOne!® combines the advantages of a smart camera solution with the well-established IntraVision software. It can be used for the quality control of preforms, closures, bottles, containers as well as labels and decoration.



The entire IntraOne!® equipment including the basic package and additional options

IntraOne!® can easily be integrated into any production line. Its design allows for use even in the most demanding environments. IntraOne!® uses an integrated industrial PC and is therefore particularly space-saving. The system can be installed quickly and effortlessly. Together with you and on-site, our experienced service technicians will find the ideal configuration for your inspection task.

VERSATILE CAPABILITIES


IntraOne!® is based on INTRAVIS' longtime experience and expertise in quality control of preforms, closures, bottles, containers as well as labels and decorations. The **well-known IntraVision software** is installed on the camera enabling use of all proven inspection mod-

ules. The system inspects for typical defects such as contamination, color or contour deviation or even any type of damages with **inspection speeds of up to 50 objects / second**.



INTRAVisionOne!

COMPREHENSIVE INSPECTION OF PLASTIC PACKAGING

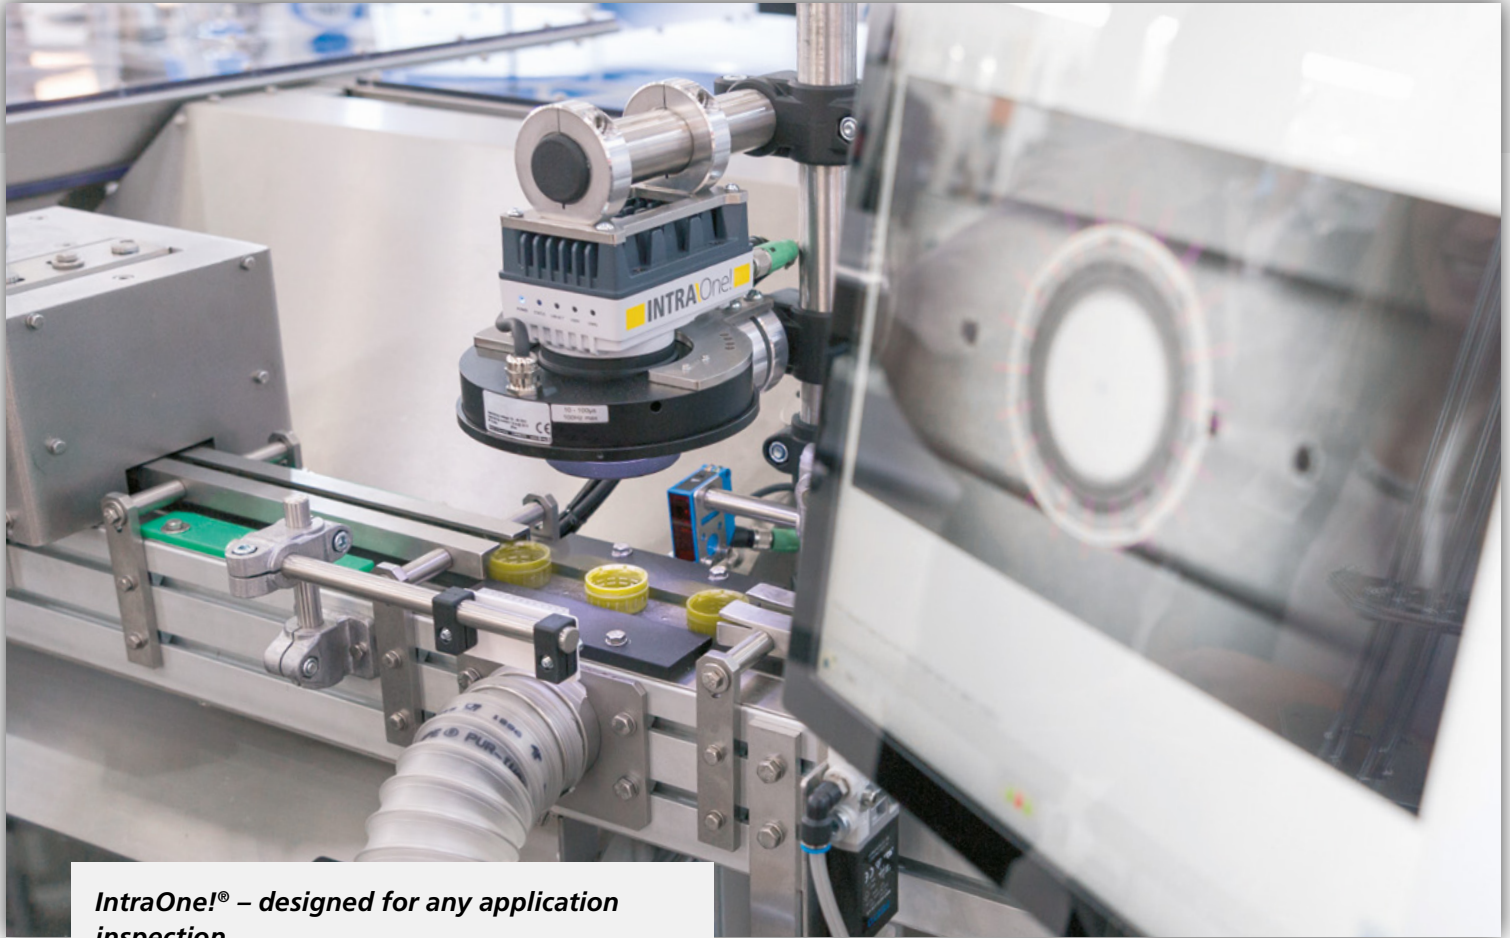

IntraOne!® – designed for any application inspection

In addition to the basic package consisting of a camera and appropriate lighting for any inspection task, many options are available.

BASIC PACKAGE

- \\ Color Camera with integrated industrial PC
- \\ IntraVision software including one INTRAVIS inspection module
- \\ Lighting
- \\ HMI
- \\ Control box
- \\ Complete wiring set (standard of 3 m)
- \\ Mounting for camera and lighting

ADDITIONAL OPTIONS

- \\ Encoder for precision object tracking
- \\ High performance lighting
- \\ Additional INTRAVIS inspection module
- \\ IntraVisualizer software
- \\ Rejection unit
- \\ Sensor
- \\ Complete design in IP 65
- \\ Supporting arm for monitor